


RS - 25 - 12 - Power Supply

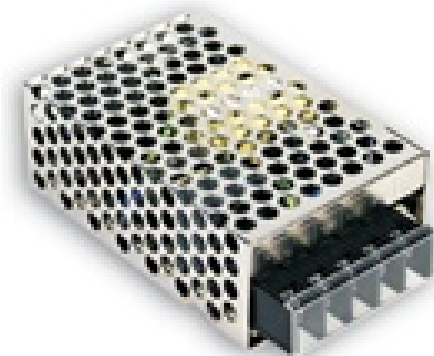

Features

- Protections: Short circuit / Over load/ Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- RoHS - conformable

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	173 ... 373 V DC
AC input current (at 230 V)	0.40 A
Efficiency	81.50 %
DC output voltage	12 V DC (10.8 ... 13.2 V DC)
Rated current	2.10 A
Rated power	25.2 W
Dimensions (mm)	78 x 51 x 28 mm

Power supply RSP 1500 W 27



Features

- Universal AC input/Full range
- AC input active surge current limiting
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC ball bearing fan
- High efficiency
- Built-in remote sense function
- Built-in 12V/0.1A auxiliary output for remote control
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	90 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	127 ... 370 V DC
AC input current (at 230 V)	8 A
Efficiency	90 %
DC output voltage	27 V DC (24 ... 30 V DC)
Rated current	56 A
Rated power	1512 W
Dimensions (mm)	278 x 127 x 83.5

Power Supply RSP 2400 W 48




Features

- AC input active surge current limiting
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC with fan speed control function
- High efficiency
- Built-in remote sense function
- Built-in 12V/0.1A auxiliary output for remote control
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature / Fan alarm

Technical specifications:

AC input voltage range	180 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	254 ... 370 V DC
AC input current (at 230 V)	12 A
Efficiency	91.50 %
DC output voltage	48 V DC (43 ... 56 V DC)
Rated current	50 A
Rated power	2400 W
Dimensions (mm)	278 x 177.8 x 63.5

Power supply SP 500 W 24

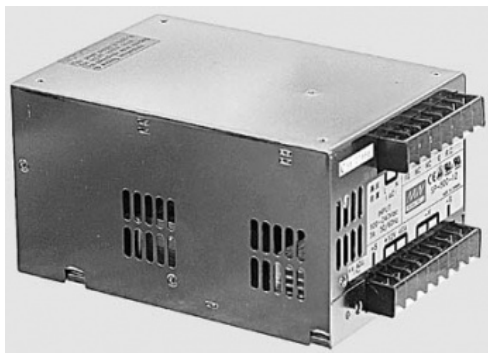

Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Built-in remote ON-OFF control
- Forced air cooling by built-in DC fan
- Protections: Short circuit/Over load/Over voltage/Over temperature

Technical specifications:

AC input voltage range	88 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	124 ... 370 V DC
AC input current (at 230 V)	3.50 A
Efficiency	85.50 %
DC output voltage	24 V DC (20 ... 26.4 V DC)
Rated current	20 A
Rated power	480 W
Dimensions (mm)	170 x 120 x 93

Power Supply RS 50-24



Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	125 ... 373 V DC
AC input current (at 230 V)	0.80 A @ 230 VAC
Efficiency	88 %
DC output voltage	24 V DC (22 ... 27.2 V DC)
Rated current	2.20 A
Rated power	52.8 W
Dimensions (mm)	99 x 97 x 36 mm

RS - 25 - 24 - power supply



Technical specifications:

AC input voltage range	88 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	125 ... 373 V DC
AC input current (at 230 V)	0
Efficiency	86 %
DC output voltage	24 V (22V ... 27.6V DC)
Rated current	1.10 A
Rated power	26.4 W
Dimensions (mm)	78 x 51 x 28 mm

Power Supply RSP 500 W 27



Features

- Universal AC input/Full range
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC ball bearing fan
- High efficiency
- Built-in remote sense function
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	2.65 A @ 230 VAC
Efficiency	89.50 %
DC output voltage	27 VDC (26 ... 30 VDC)
Rated current	18.60 A
Rated power	502.2 W
Dimensions (mm)	230 X 127 X 40.5

Power Supply HRPG-600-36



Features

- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC with fan speed control function
- High efficiency
- Built-in remote sense function
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	5 A @ 230 VAC
Efficiency	89 %
DC output voltage	36 V DC (28.8 ... 39.6 V DC)
Rated current	17.50 A
Rated power	630 W
Dimensions (mm)	218x105x63,5 mm

Power Supply RSP 500 W 12



Features

- Universal AC input/Full range
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC ball bearing fan
- High efficiency
- Built-in remote sense function
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	2.65 A @ 230 VAC
Efficiency	88 %
DC output voltage	12 V DC (10 ... 13.2 V DC)
Rated current	41.70 A
Rated power	500.4 W
Dimensions (mm)	230 X 127 X 40.5

Power Supply RSP 320 W 12



Features

- Universal AC input/Full range
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC fan with fan speed control function
- High efficiency
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	88 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	124 ... 370 V DC
AC input current (at 230 V)	2 A @ 230 VAC
Efficiency	88 %
DC output voltage	12 V DC (10 ... 13.2 V DC)
Rated current	26.70 A
Rated power	320.4 W
Dimensions (mm)	215 X 115 X 30 mm

Power Supply RSP 150 W 12



Features

- Universal AC input/Full range
- Built-in active PFC function, PF>0.93
- Cooling by free air convection
- High efficiency
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	0.80 A @ 230 VAC
Efficiency	90 %
DC output voltage	12 V DC (11.4 ... 13.2 V DC)
Rated current	12.50 A
Rated power	150 W
Dimensions (mm)	199 x 99 x 30 mm

Power supply RSP 150 W 27



Features

- AC input range: 85 ... 264 V AC
- Protections: Short circuit / Over load/ Over voltage / Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- built-in active PFC function
- Remote Control

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	0.80 A @ 230 VAC
Efficiency	89.50 %
DC output voltage	27 V DC (25.7 ... 29.7 V DC)
Rated current	5.60 A
Rated power	151.2 W
Dimensions (mm)	199 x 99 x 30 mm

Power Supply RSP 150 W 24



Features

- Protections: Short circuit / Over load / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Fixed switching frequency at 25 kHz
- LED indicator for power on

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	0.80 A @ 230 VAC
Efficiency	89 %
DC output voltage	24 V DC (22.8 ... 26.4)
Rated current	6.30 A
Rated power	151.2 W
Dimensions (mm)	199 x 99 x 30 mm

Power supply RSP 320 W 27



Power Supply RSP 500 W 48



Features

- Universal AC input/Full range
- Built-in active PFC function, PF>0.95
- Forced air cooling by built-in DC ball bearing fan
- High efficiency
- Built-in remote sense function
- Built-in remote ON-OFF control
- Protections: Short circuit / Overload / Over voltage / Over temperature

Technical specifications:

AC input voltage range	85 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	120 ... 370 V DC
AC input current (at 230 V)	2.65 A @ 230 VAC
Efficiency	90.50 %
DC output voltage	48 V DC (41 ... 56 V DC)
Rated current	10.50 A
Rated power	504 W
Dimensions (mm)	230 X 127 X 40.5

Power Supply RSP 200 W 12



Features

- Universal AC input / full range
- Built-in active PFC function, PF>0.93
- Built-in fan speed control
- Built-in cooling fan speed control
- Built-in constant current limiting circuit
- Protections: Short circuit/Over load/Over voltage/Over temperature
- Fixed switching frequency at PFC: 67KHz PWM: 134KHz
- LED indicator for power on
- 100% full load burn-in test
- Remote ON-OFF control (Optional)

Technical specifications:

AC input voltage range	88 ... 264 V AC (47 ... 63 Hz)
DC input voltage range	124 ... 370 V DC
AC input current (at 230 V)	1.30 A @ 230VAC
Efficiency	89 %
DC output voltage	12 V DC (10 ... 13.2 V DC)
Rated current	16.70 A
Rated power	200.4 W
Dimensions (mm)	215 X 115 X 30 mm

Power Supply RACM120036SAVENC



Features

- Closed design (case)
- Overload protection by current limiting, auto recovery
- High efficiency
- Protected against short circuit, over load, over voltage, over temperature
- Active PFC function, PF>0.95
- Remote ON/OFF function
- RoHs compliant